



## HYALINE SUCTION ARM | DESCRIPTION

The Hyaline suction arm gives an optimal ergonomic at technical lab work, as it can be placed in different positions. You do not have this opportunity with a fixed suction hood.

The flexible tube and mouthpiece can easily be placed both in front of and behind the subject at the table, or it can be placed at the front of the table, like a traditional suction hood.

The built-in silencer ensures a comfortable noise level, even at a high volume of air. The Hyaline suction arm is available both with and without a switch and valve. They respectively start the suction motor and opens for the air, when the suction arm is brought in working position.

The specially designed mouthpiece has a broad edge, which enables the air to grasp particles and dust better. A spring in the mouthpiece prevents larger items to be sucked in.

The Hyaline suction arm is connected to the CP suction motor or any other vacuum systems which provide a sufficient vacuum.

The Hyaline is to be used with various mounting fittings.


## HYALINE SUCTION ARM | FEATURES

Features of the Hyaline suction arm include:

- ✓ Integrated noise reducer
- ✓ Built in valve shut-off suction stream
- ✓ Switch for activation of suction motor
- ✓ Flexible mouthpiece for optimal ergonomic



# HYALINE SUCTION ARM | TECHNICAL SPECIFICATIONS

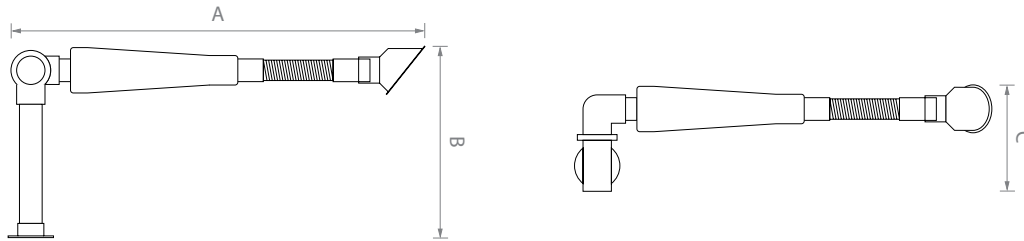

## DIMENSIONS

PRODUCT	ITEM NO.	WIDTH (A)	HEIGHT (B)	DEPTH (C)	OUTLET	WEIGHT
Hyaline / vlv / swc / el.	900180	735 mm	338 mm	188 mm	Ø40 mm	1,2 kg
Hyaline / vlv.	900181	735 mm	338 mm	188 mm	Ø40 mm	1,2 kg
Hyaline / swc / el.	900182	735 mm	338 mm	188 mm	Ø40 mm	1,2 kg
Hyaline / std.	900183	735 mm	338 mm	188 mm	Ø40 mm	1,2 kg

## ACCESSORIES

PRODUCT	ITEM NO.	DIAMETER	LENGTH	WEIGHT
Mouthpiece, w. edge	901141	Ø40 mm	-	0,05 kg
Mouthpiece, straight	901143	Ø40 mm	-	0,06 kg
Mouthpiece, Ø200 mm	901147	Ø40 mm	-	0,13 kg
Flexible tube	901110	Ø40 mm	250 mm	0,1 kg
Flexible tube	901111	Ø40 mm	330 mm	0,13 kg
Flexible tube	901112	Ø40 mm	470 mm	0,2 kg

## RELATED PRODUCTS



PRODUCT	PAGE NO.
CP Suction motors	SM 03



PRODUCT	PAGE NO.
Superflex	SA 02